Distributed systems

Total Order Broadcast

Prof R. Guerraoui
Distributed Programming Laboratory

Overview

- **Intuitions:** what is total order broadcast?
- **Specifications** of ***total order broadcast***
- **Consensus-**based total order algorithm

Broadcast

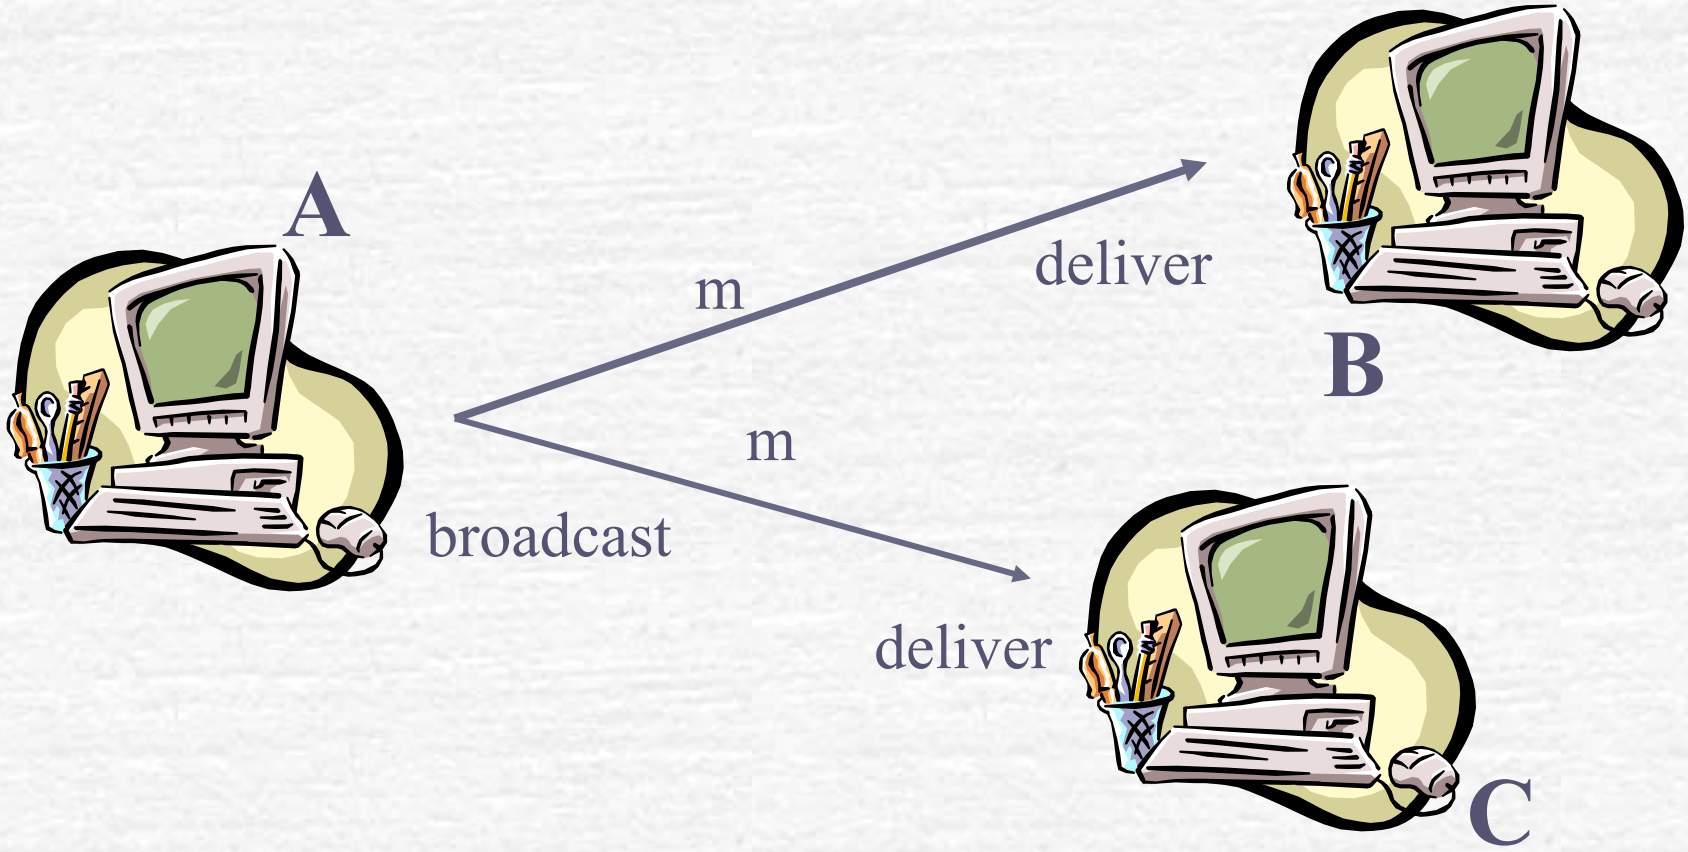

Intuitions (1)

- In ***reliable*** broadcast, the processes are free to deliver messages in any order they wish
- In ***causal*** broadcast, the processes need to deliver messages according to some order (causal order)
- The order imposed by causal broadcast is however partial: some messages might be delivered in different order by the processes

Reliable Broadcast

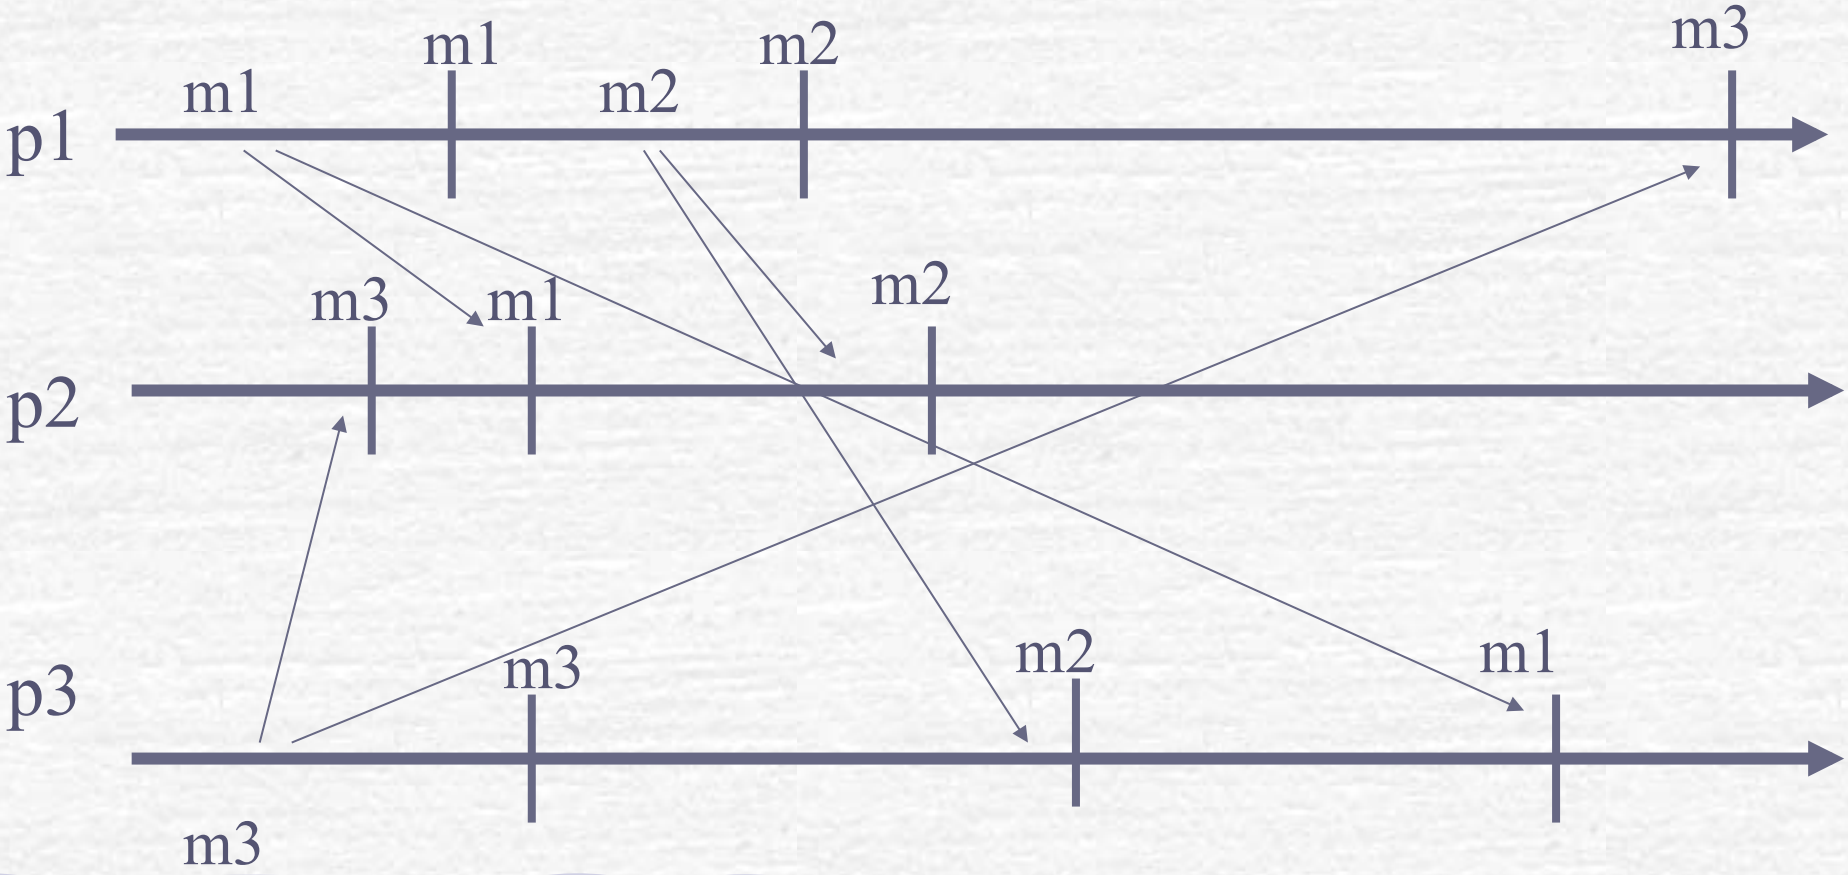

Causal Broadcast

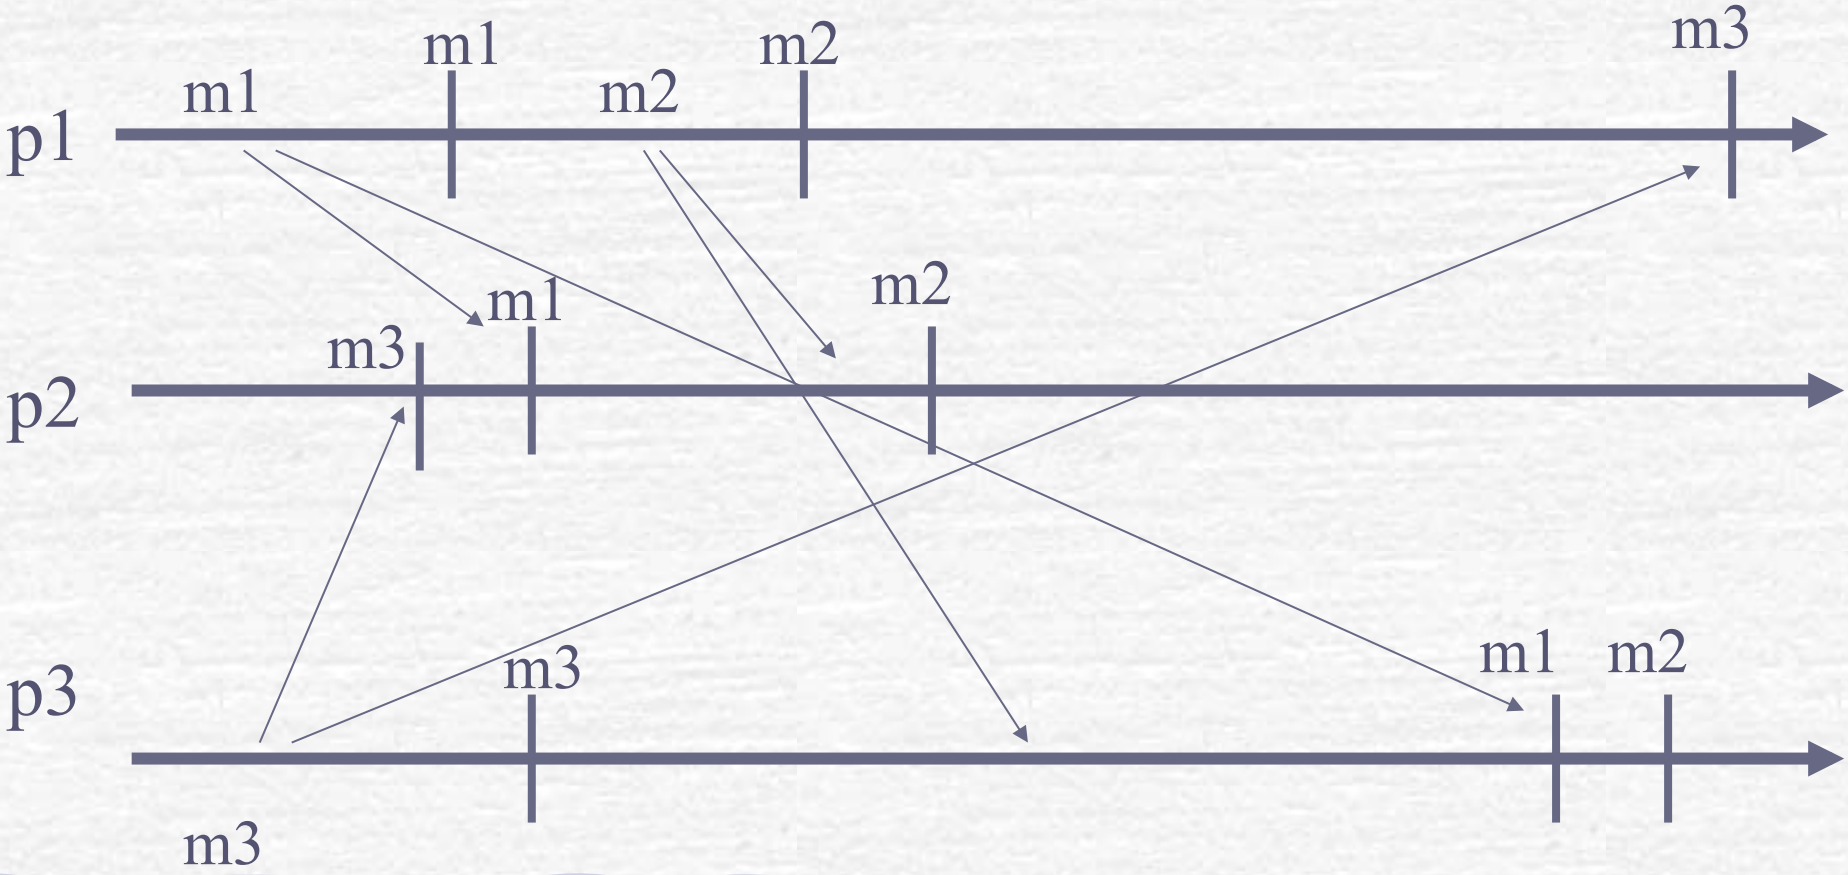

Intuitions (2)

- In ***total order*** broadcast, the processes must deliver all messages according to the same order (i.e., the order is now total)
- Note that this order does not need to respect causality (or even FIFO ordering)
- Total order broadcast can be made to respect causal (or FIFO) ordering

Total Order Broadcast (I)

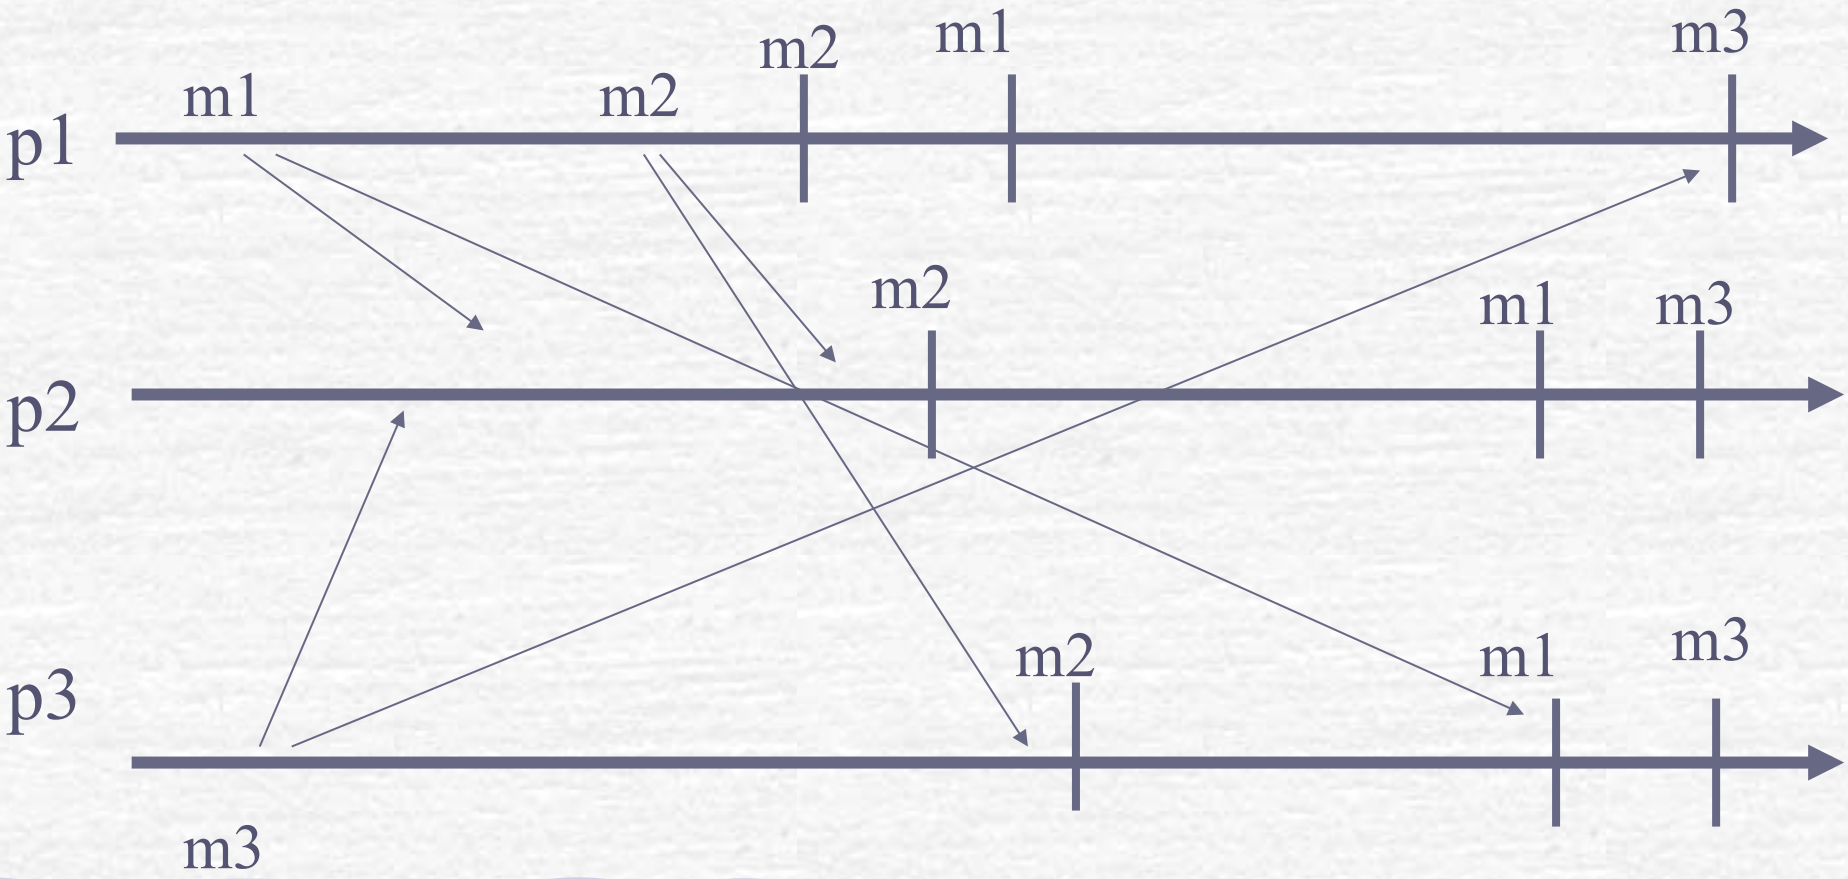

Total Order Broadcast (II)

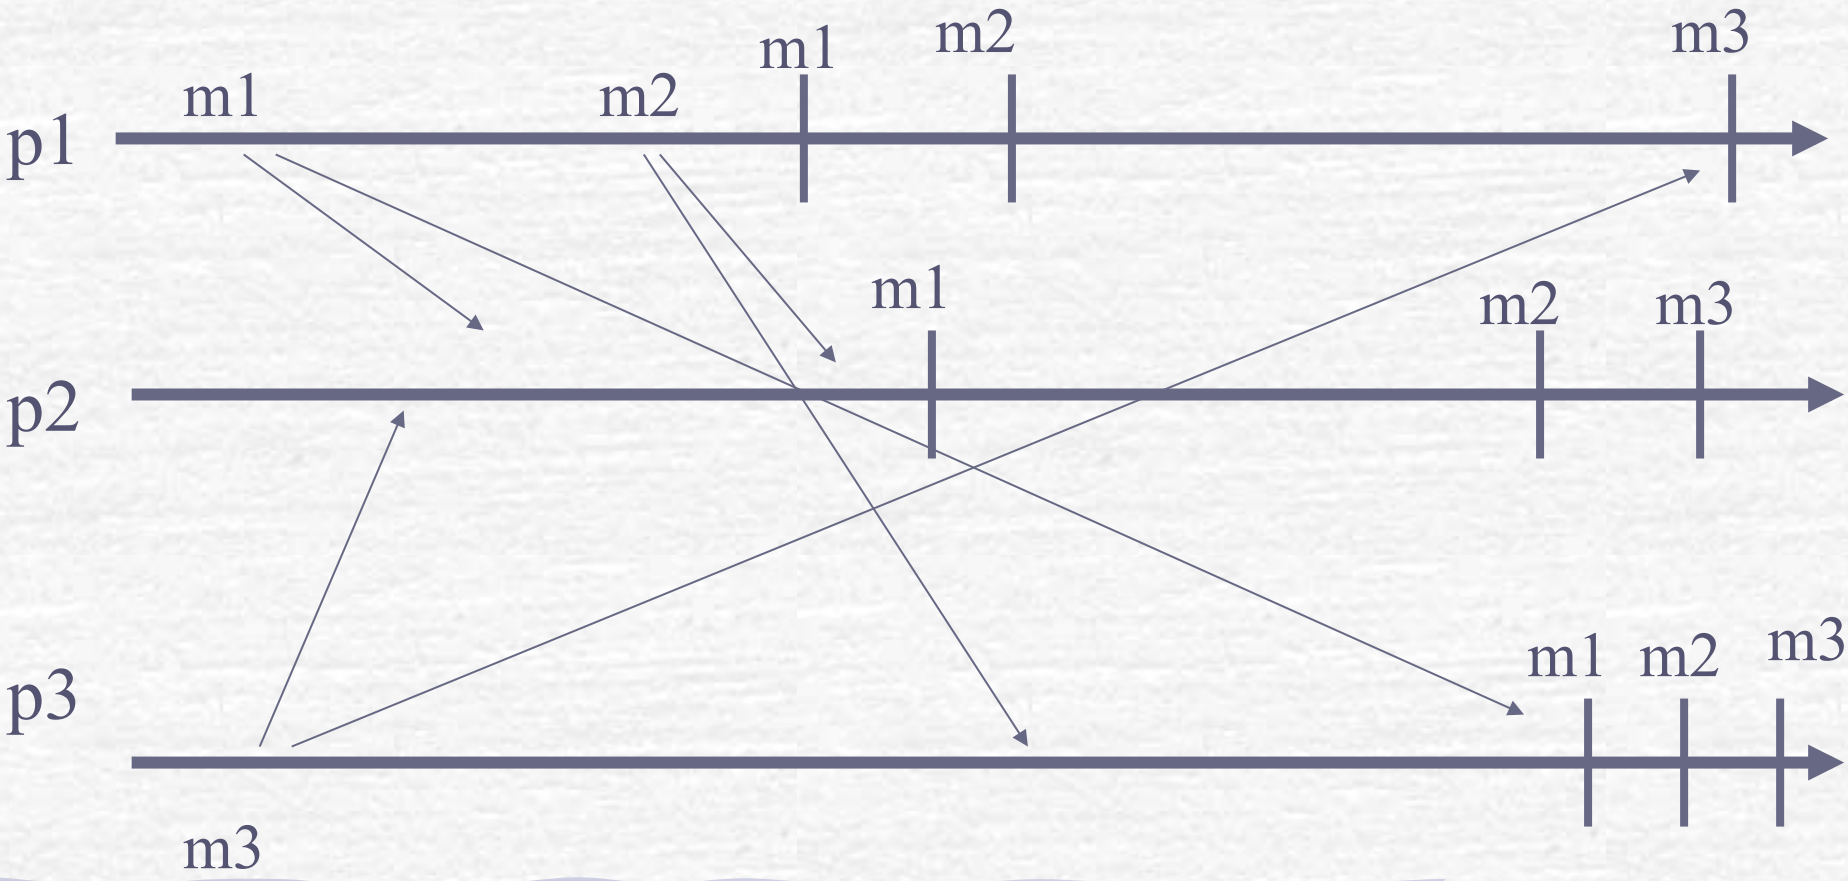

Intuitions (3)

- A replicated service where the replicas need to treat the requests in the ***same order*** to preserve consistency

(we talk about state machine replication)

- A notification service where the subscribers need to get notifications in the same order

Modules of a process

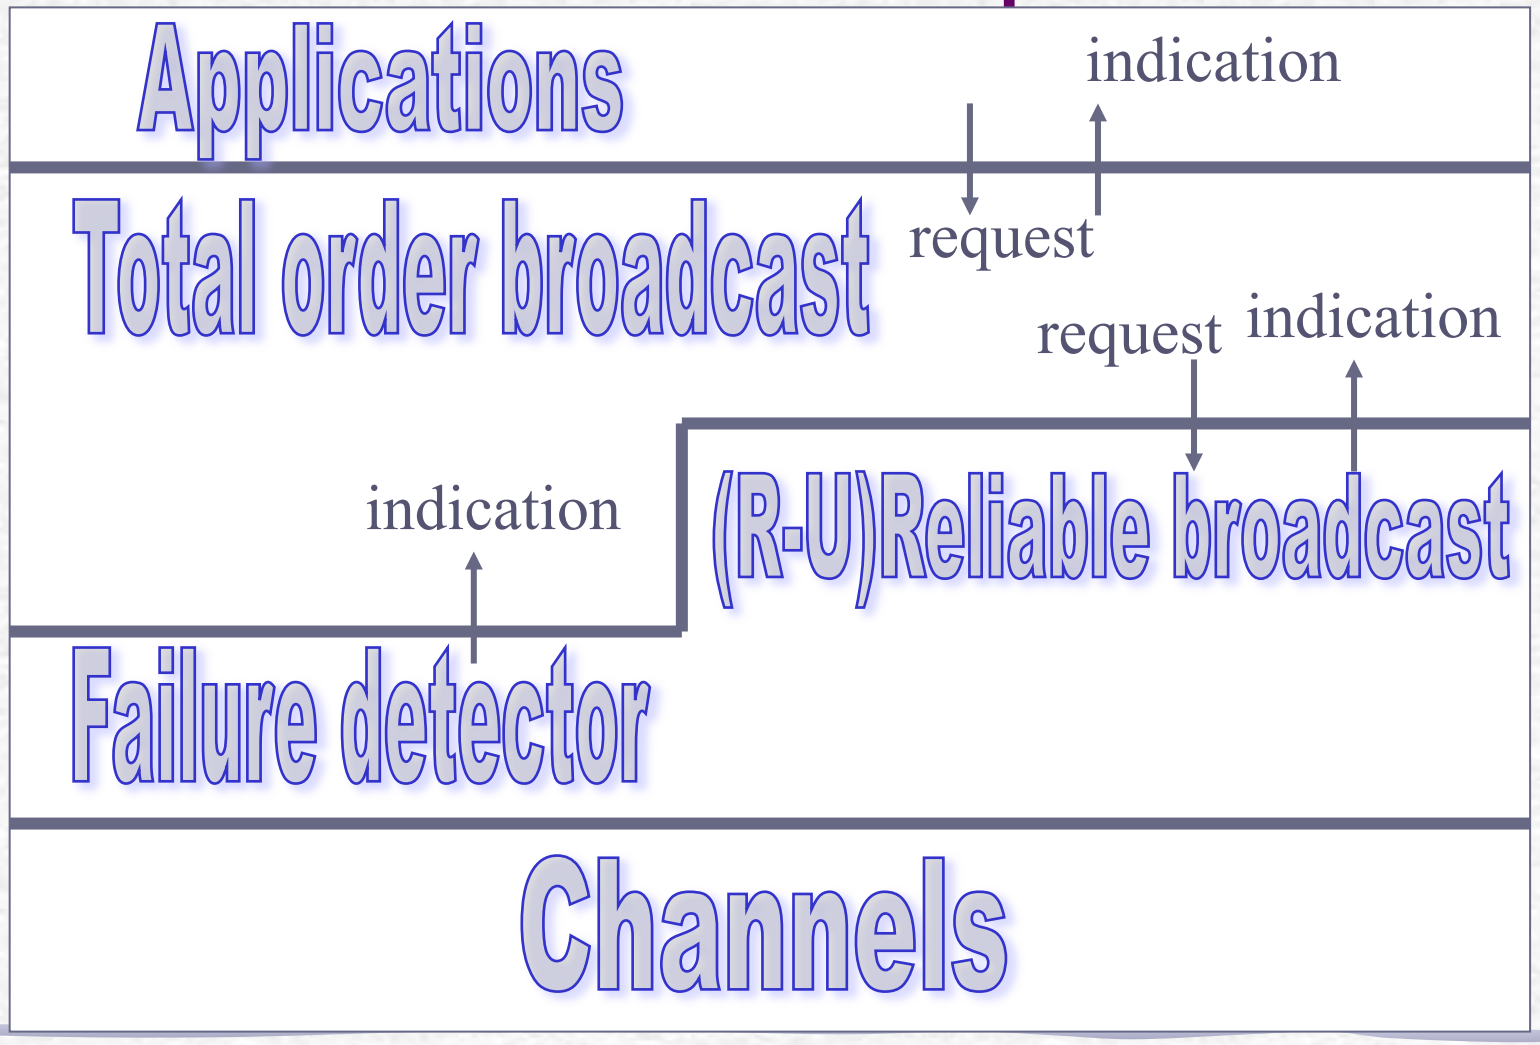

Overview

- **Intuitions:** what is total order broadcast?
- **Specifications** of ***total order broadcast***
- **Consensus-**based algorithm

Total order broadcast (tob)

- ***Events***
  - Request: <toBroadcast, m>
  - Indication: <toDeliver, src, m>
- ***Properties:***
  - ***RB1, RB2, RB3, RB4***
  - ***Total order property***

Specification (I)

Validity: If pi and pj are correct, then every message broadcast by pi is eventually delivered by pj

No duplication: No message is delivered more than once

No creation: No message is delivered unless it was broadcast

(Uniform) Agreement: For any message m. If a correct (any) process delivers m, then every correct process delivers m

Specification (II)

(Uniform) Total order:

Let m and m’ be any two messages.

Let pi be any (correct) process that delivers m without having delivered m’

Then no (correct) process delivers m’ before m

Specifications

Note the difference with the following properties:

Let pi and pj be any two correct (any) processes that deliver two messages m and m'. If pi delivers m' before m, then pj delivers m' before m.

Let pi and pj be any two (correct) processes that deliver a message m. If pi delivers a message m' before m, then pj delivers m' before m.

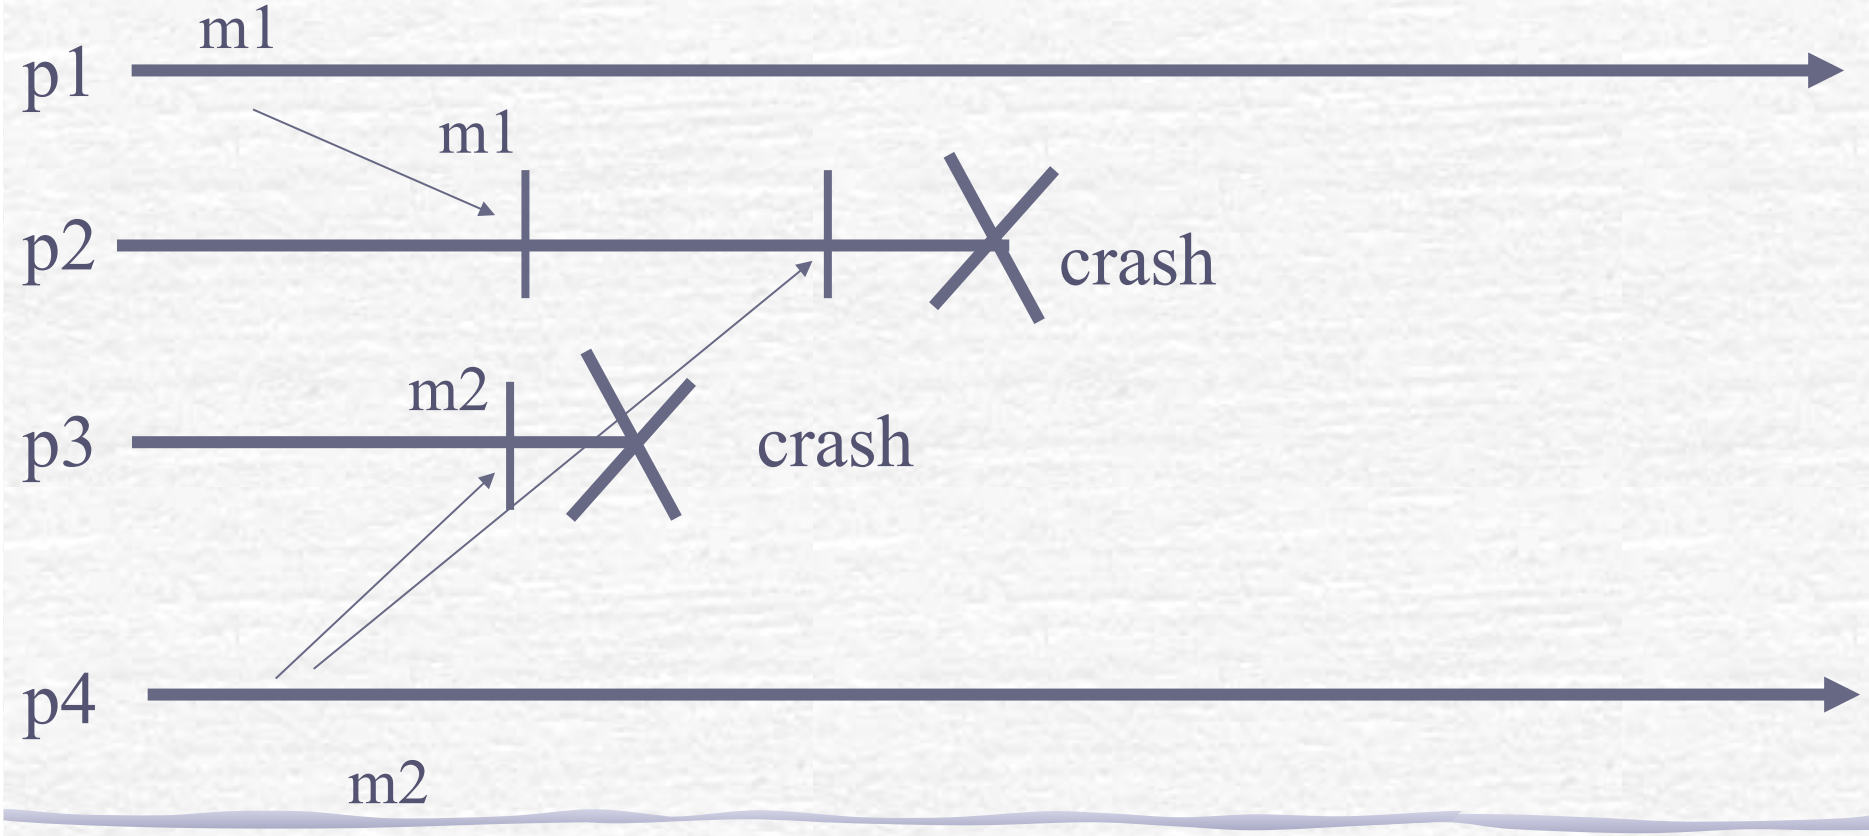
m1
p1
m1
p2
crash
m2
p3
crash
p4
m2

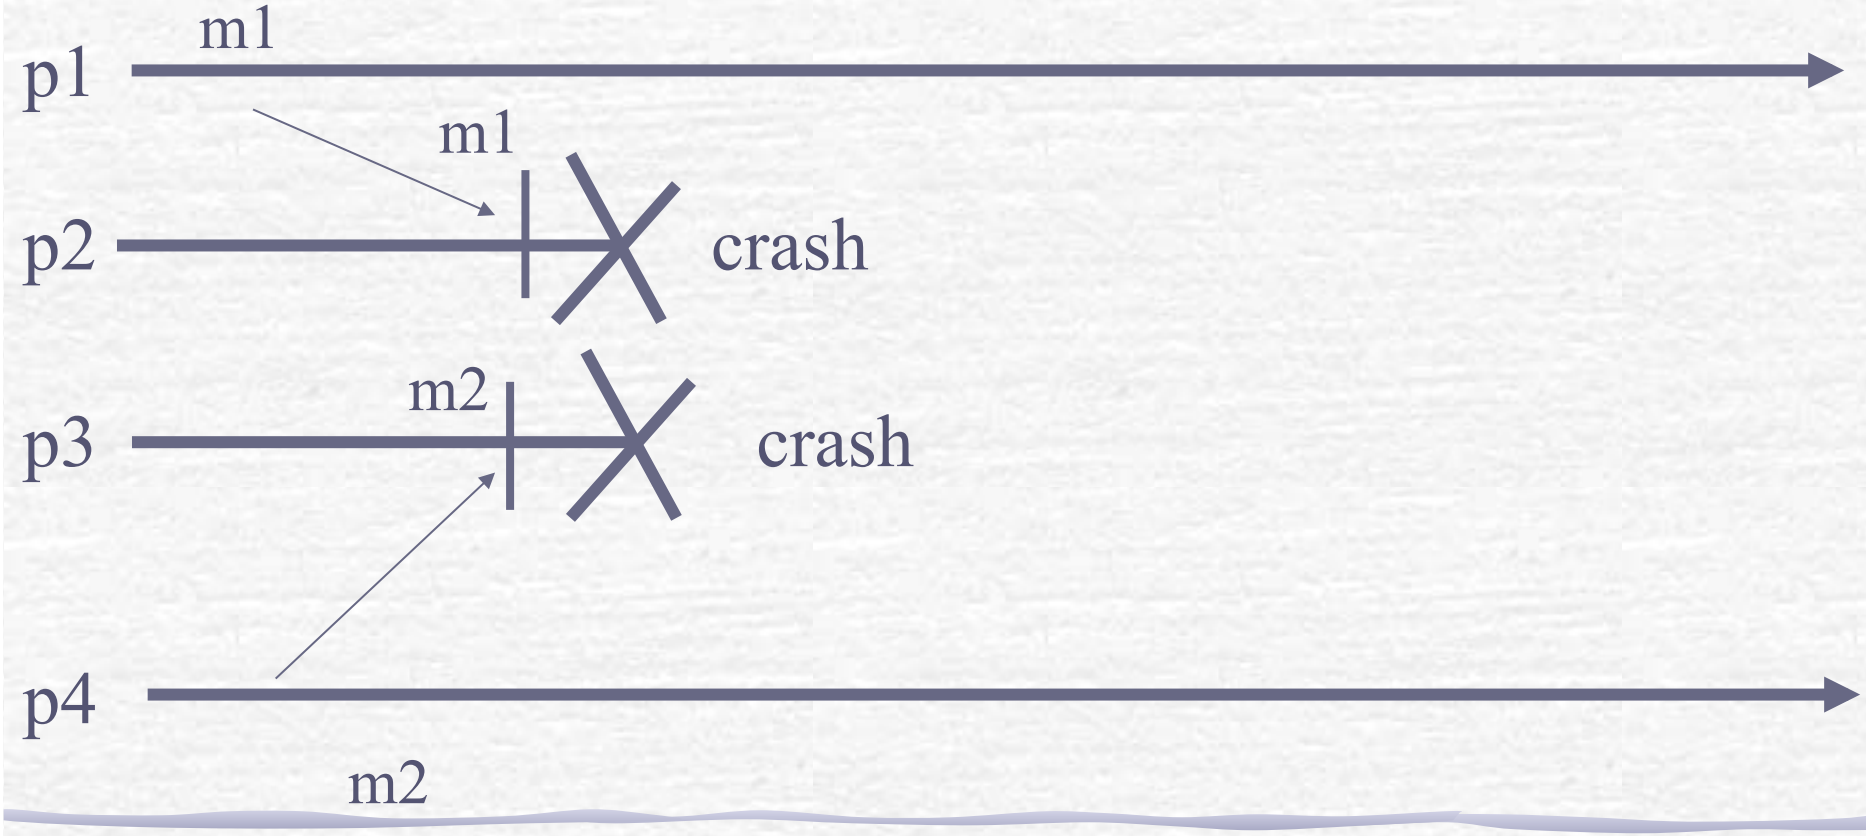
m1
p1
m1
p2
crash
m2
p3
crash
p4
m2

Overview

- **Intuitions:** what total order broadcast can bring?
- **Specifications** of ***total order broadcast***
- **Consensus-**based algorithm

(Uniform) Consensus

In the (uniform) consensus problem, the processes propose values and need to agree on one among these values

C1. Validity: Any value decided is a value proposed

C2. (Uniform) Agreement: No two correct (any) processes decide differently

C3. Termination: Every correct process eventually decides

C4. Integrity: Every process decides at most once

Consensus

- ***Events***
  - Request: <Propose, v>
  - Indication: <Decide, v'>
- ***Properties:***
  - ***C1, C2, C3, C4***

Modules of a process

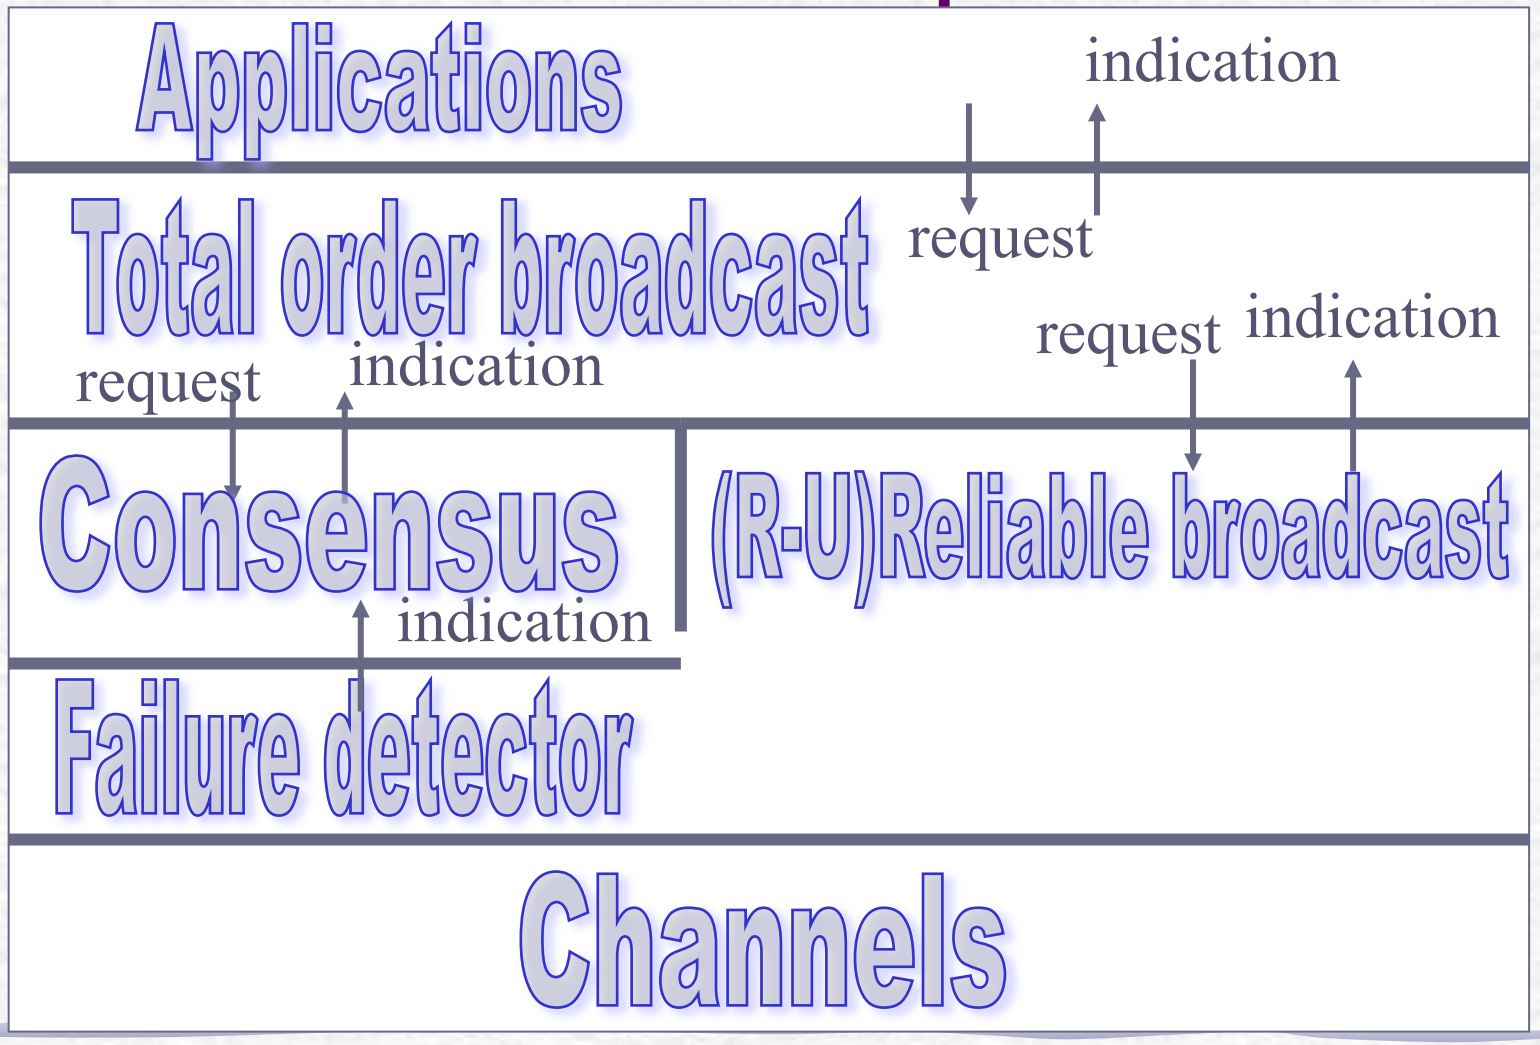

Algorithm

- **Implements:** TotalOrder (to).
- **Uses:**
  - ReliableBroadcast (rb).
  - Consensus (cons);
- **upon event** < Init > **do**
  - unordered: = delivered: = ∅;
  - wait := false;
  - sn := 1;

Algorithm (cont'd)

- **upon event** < toBroadcast, m> **do**
  - **trigger** < rbBroadcast, m>;
- **upon event** <rbDeliver,sm,m> and (m $\notin$ delivered) **do**
  - unordered := unordered U {(sm,m)};
- **upon** (unordered $\neq \emptyset$) and not(wait) **do**
  - wait := true:
  - **trigger** < Propose, unordered>$_{sn}$;

Algorithm (cont'd)

- **upon event** <Decide,decided>$_{sn}$ **do**
  - unordered := unordered \ decided;
  - ordered := deterministicSort(decided);
  - for all (sm,m) in ordered:
    - **trigger** < toDeliver,sm,m>;
    - delivered := delivered U {m};
  - sn : = sn + 1;
  - wait := false;

Equivalences

1. One can build consensus with total order broadcast
2. One can build total order broadcast with consensus and reliable broadcast

Therefore, consensus and total order broadcast are equivalent problems in a system with reliable channels